


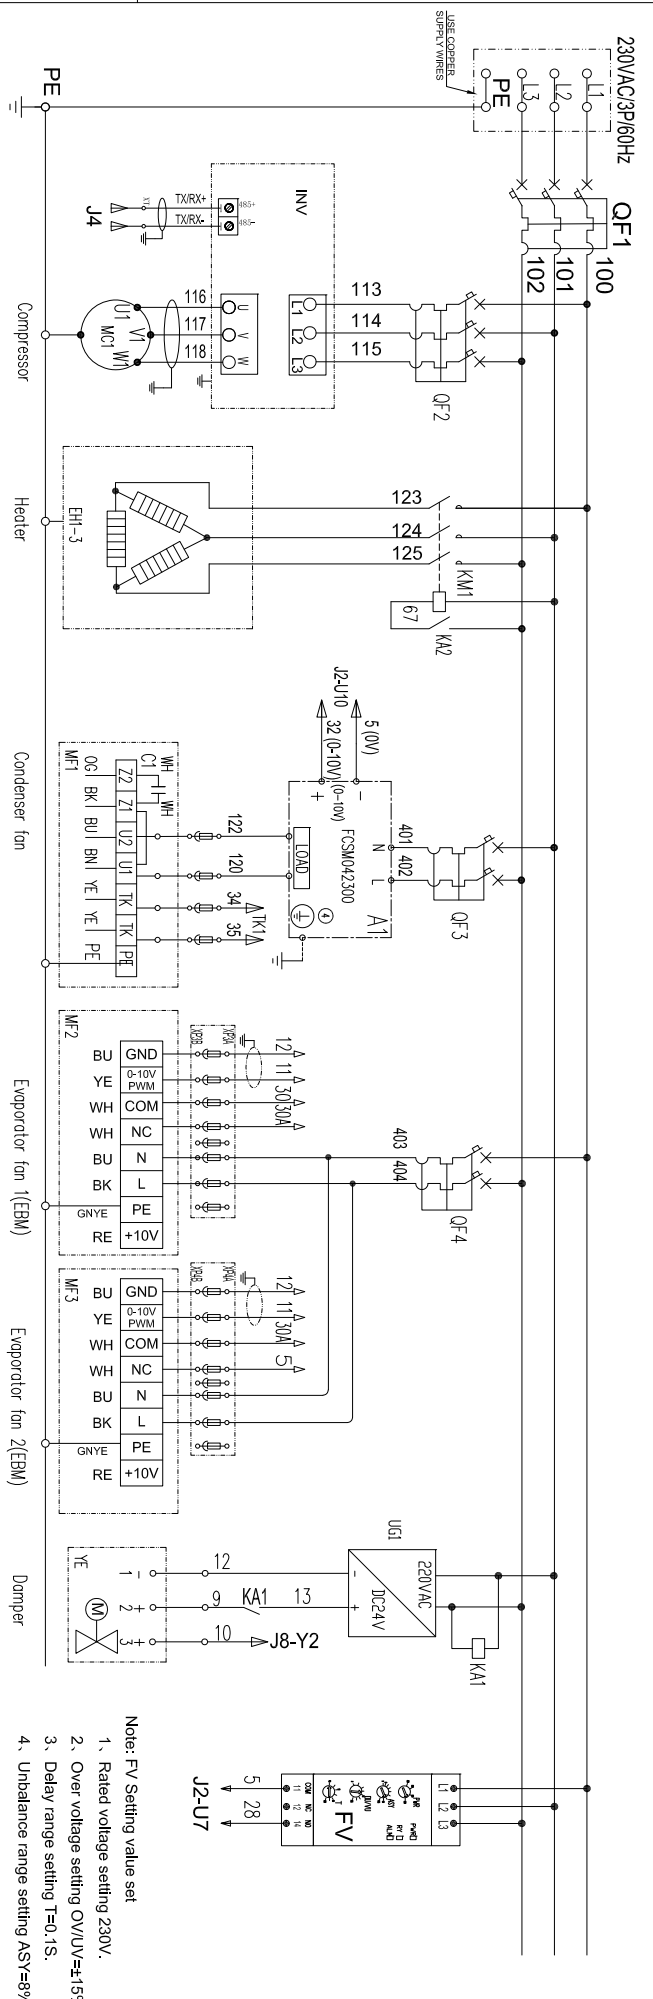


B

- Note: FV Setting value set
1. Rated voltage setting 230V.
 2. Over voltage setting 0V/UV=±15%.
 3. Delay range setting T=0.1S.
 4. Unbalance range setting ASV=8%.

B

A

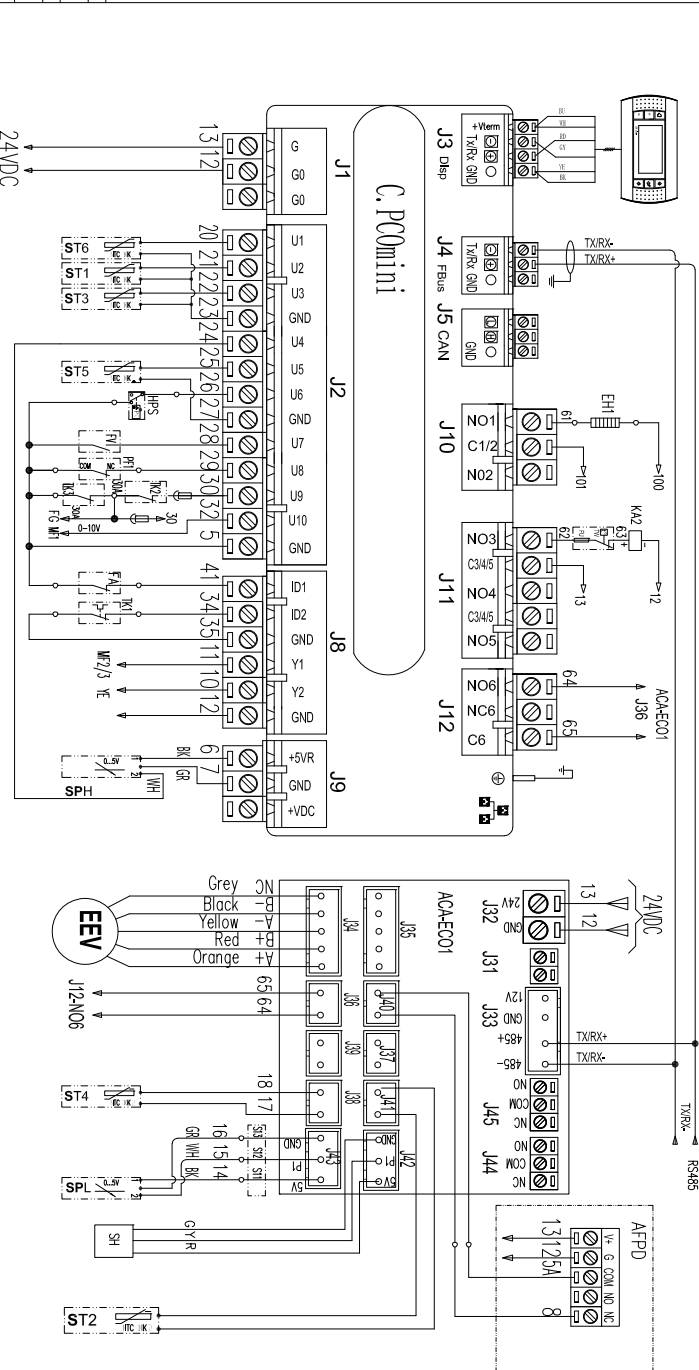

24VDC

A

Wiring Diagram

Models

11V/B3MR410BAC
15V/B4MR410BAC

SN	Sign	Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
1	QF	Breaker	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
2	KA	Auxiliary relay	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
3	SPH	High Pressure Transducer	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
4	U6	Switch power supply	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
5	TC	Transformer	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
6	SH	Outdoor RH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
7	HPS	High pressure switch	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
8	ACAEC01	Electronic expansion valve actuator	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
9	PH1	Air pressure differential switch	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
10	TK/IND	Evaporator fan overload	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
11	AFPD	Dust sensor (optional)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
12	CCO/BK	Compressor	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
13	YE	Air damper actuator	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
14	TW	Temperature switch for heating	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
15	FU	Thermal fuse for heating	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
16	EH	Centrifugal heater	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
17	EH-3	Electric heaters (optional)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17

PART#:1170105540

SN:V03